



FLS Strobe beacon

- Ø 60mm Multistrobe-Warning beacon
- significantly increased visibility compared to a 1J Xenon Strobe beacon
- ideal for Alarms on Gates, Machinery and Process industry



TECHNICAL DATA

Housing	Ø 60 mm, ABS black
Lens	Polycarbonate (UV stabilized), ribbed inside
Montageart	horizontal oder vertikal
Cable entry	Back: Grommet 6-9 mm
Connection technology	Screw Terminal
Leakage current	0,003 A
Beacon type	6-times strobe / random
Light source	LED
Duty cycle	100 %
Service life	> 50.000 h
Operating temperature	-30°C/+60°C
Degree of protection	IP65
Weight	65,8 g

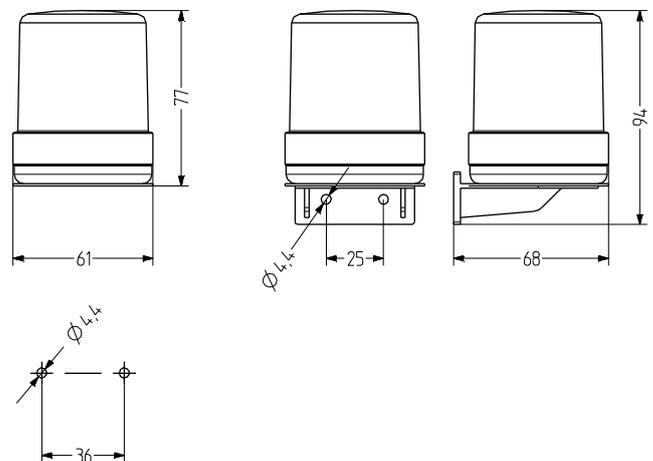

FLS

ORDER DATA - LENS

Lens color			Nominal voltage	Voltage range (V)	Nominal current (A)
amber	red	yellow			
841001405	841002405	841007405	24 V AC/DC	+/- 10 %	0,125
841001313	841002313	841007313	230-240 V AC	+/- 10 %	0,032



BHF



BVF

ORDER DATA - BASE

Type	Type of accessory	Weight	Order number
BHF	Base for horizontal mounting	20 g	840501900
BVF	Base for vertical mounting	35 g	840502900