


# RMM+RBA LED multi colour beacon with audible base


- 110 mm Ø large modular LED multi colour beacon
- outstanding light intensity and excellent signal effect
- up to 25 Cd luminous intensity (colour-dependent)
- all 7 colours externally controllable
- LED steady light
- audible base with 32-tone sounder
- >95 dB sound pressure, 3 tones externally controllable
- unique, appealing product design
- high protection class IP66 & impact resistance IK08
- metal bracket for mounting on walls (accessory)
- for industrial and general applications

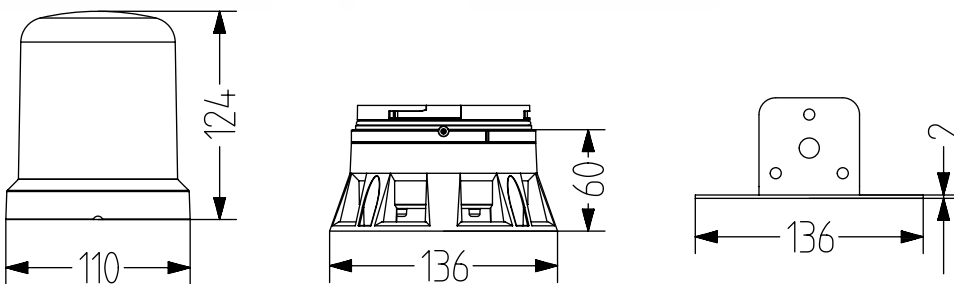

## TECHNICAL DATA

Size	110 mm
Housing	Polycarbonate
Lens	Polycarbonate, ribbed inside, colours: red, yellow, green, blue, clear, magenta, turquoise
Type of mounting	Any, conduit mounting
Cable entry	Cables are inserted from below
Connection technology	Screw terminal
Leakage current	3mA
Beacon type	Steady light

Light source	LED (6x5 LEDs)
Duty cycle	100 %
Service life	Light source > 50.000 h
Operating temperature	-30 / +60°C
Degree of protection	IP66, UL Type 4, 4X, 13
Impact resistance	IK08
Volume	Up to 95 dB
Tone	32 tones, 3 tones can be switched externally



# RMM+RBA

## ORDER DATA

Type	24-48VAC/DC	110-240VAC	Nominal voltage	Voltage range (V)	Nominal current
RMM	850530408		24/48VAC/DC	+/-10%	400mA
		850530313	110/120/230/240VAC	+/-10%	105mA

Type	Type of product	24-48 V AC/DC	110-240 V AC	Voltage range (V)	Nominal current	Mains frequency
RBA	Audible base for R series beacons	850535408		+/-10%	230mA	50-60 Hz
			850535313	+/-10%	70mA	50-60 Hz



RWA

## ACCESSORIES

Type	Type of accessory	Order number
RWA	Metal bracket for audible bases	850531900