


# QSL LED steady/flashing beacon with buzzer indicator

- 184 mm cubic-design LED steady/flashing beacon with built-in buzzer indicator
- Max. 105 dB [A] sound pressure, infinitely adjustable
- UV-stabilised material
- Steady and flashing light, can be switched externally
- Beacon with very good frontal/lateral signalling effect
- 170 cd luminous intensity
- For industrial and general application



Internal diffuser and special lens pattern for optimal 360° signalling effect

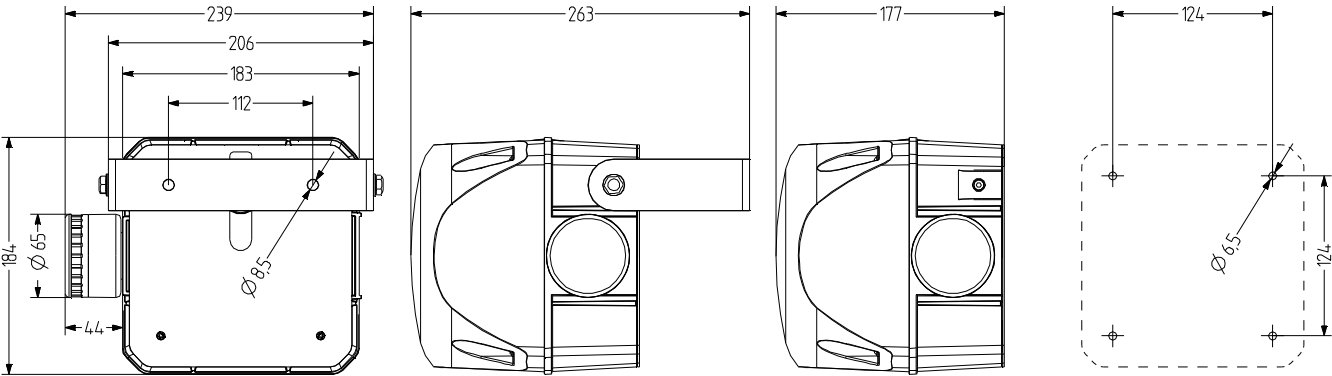

## TECHNICAL DATA

|                        |                                                                        |
|------------------------|------------------------------------------------------------------------|
| Housing                | 184 mm (square), Polycarbonate red, piezo buzzer black                 |
| Lens                   | Polycarbonate, ribbed inside orange, red, clear, blue, green or yellow |
| Type of mounting       | any, any                                                               |
| Connection technology  | Screw/plug-in terminal up to 2,5 mm²                                   |
| Beacon type            | Steady beacon or Flashing beacon                                       |
| Light source           | 6 High Power LEDs                                                      |
| Luminous intensity     | 170 Cd                                                                 |
| Strobe/flash frequency | 1,4 Hz                                                                 |

|                       |                                                                                       |
|-----------------------|---------------------------------------------------------------------------------------|
| Tone                  | 3 Tones, 3 Tones can be switched externally, Steady tone, Pulsing tone or Wobble tone |
| Volume                | 85-105 dB [can be adjusted with potentiometer]                                        |
| Tone frequency        | 3.300 Hz                                                                              |
| Duty cycle            | 100 %                                                                                 |
| Service life          | Light source: 50.000 h                                                                |
| Operating temperature | -30 °C / +60 °C                                                                       |
| Degree of protection  | IP65                                                                                  |
| Impact resistance     | IK07                                                                                  |
| Weight                | 1,77 kg                                                                               |



QSL

ORDER DATA

| Lens colour | Nominal voltage | Voltage range (V) | Nominal current (A) | Order number |
|-------------|-----------------|-------------------|---------------------|--------------|
| orange      | 24 V AC/DC      | +/- 10 %          | 0,837               | 876 361 405  |
|             | 110-120 V AC    | +/- 10 %          | 0,252               | 876 361 310  |
|             | 230-240 V AC    | +/- 10 %          | 0,254               | 876 361 313  |
| red         | 24 V AC/DC      | +/- 10 %          | 0,837               | 876 362 405  |
|             | 110-120 V AC    | +/- 10 %          | 0,252               | 876 362 310  |
|             | 230-240 V AC    | +/- 10 %          | 0,254               | 876 362 313  |
| clear       | 24 V AC/DC      | +/- 10 %          | 0,837               | 876 364 405  |
|             | 110-120 V AC    | +/- 10 %          | 0,252               | 876 364 310  |
|             | 230-240 V AC    | +/- 10 %          | 0,254               | 876 364 313  |
| blue        | 24 V AC/DC      | +/- 10 %          | 0,837               | 876 365 405  |
|             | 110-120 V AC    | +/- 10 %          | 0,252               | 876 365 310  |
|             | 230-240 V AC    | +/- 10 %          | 0,254               | 876 365 313  |
| green       | 24 V AC/DC      | +/- 10 %          | 0,837               | 876 366 405  |
|             | 110-120 V AC    | +/- 10 %          | 0,252               | 876 366 310  |
|             | 230-240 V AC    | +/- 10 %          | 0,254               | 876 366 313  |
| yellow      | 24 V AC/DC      | +/- 10 %          | 0,837               | 876 367 405  |
|             | 110-120 V AC    | +/- 10 %          | 0,252               | 876 367 310  |
|             | 230-240 V AC    | +/- 10 %          | 0,254               | 876 367 313  |



ACCESSORIES

| Type | Type of accessory                                                                         | Weight | Order number |
|------|-------------------------------------------------------------------------------------------|--------|--------------|
| AMK  | Mounting set for combining several pieces of signalling equipment of the same size        | 10 g   | 874 010 900  |
| AB3  | Mounting set for metal bracket for mounting in any direction (e.g. on mounting platforms) |        | 874 033 900  |
| AG3  | Flat seal for installation on smooth surfaces                                             |        | 874 023 900  |
| AKV  | Cable gland M20x1,5                                                                       |        | 698 800 026  |

TONE TABLE

| Tone on terminal |   |    |                 |
|------------------|---|----|-----------------|
| La               | N | Lb |                 |
| X                | X |    | pulsing tone    |
|                  | X | X  | wobble tone     |
| X                | X | X  | continuous tone |