

Modul-Perfect 70 Signal Tower Light Modules

-30°C to +70°C [-22°F to +158°F]



UL Type 4/4X/13 IP66/ IP67*



WARNING

AVERTISSEMENT

WARNUNG

AVVERTENZA

ATENÇÃO

ADVERTENCIA

Do not use strobe lights around anyone suffering from cerebral disorders (epilepsy). Strobe lights may cause seizures to occur.

Ne pas utiliser de stroboscopique à proximité de personnes souffrant de problèmes cérébraux (épilepsie), afin d'éviter tout risque de crise.


Verwenden Sie keine Blitzleuchten-Module im Nahbereich von Personen die an Epilepsie leiden.

Non usare luci stroboscopiche nelle vicinanze di persone sofferenti di epilessia.

Não usar luzes strobe perto de pessoas sofrendo de problemas cerebrais (epilepsia). Estas luzes podem provocar um ataque.



No utilizar luz estroboscópica alrededor de personas con problemas cerebrales (epilepsia). La luz estroboscópica puede causar ataques epilépticos.

ROTATING MODULES IN-LINE (PC7DR)

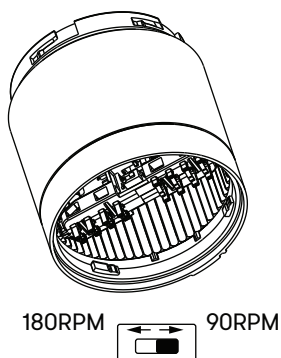

180RPM 90RPM

BEACON (PC7DRB)

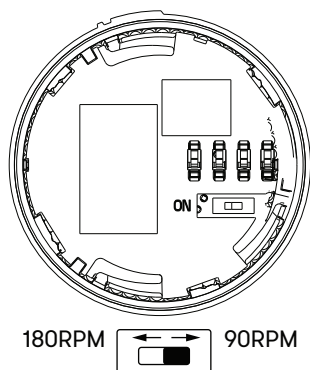


180RPM 90RPM

DIP SWITCH SETTINGS:

OFF = ROTATING SPEED 1 (90RPM)


"ON" = ROTATING SPEED 2 (180RPM)

BEACON STROBE MODULE (PC7DFB)

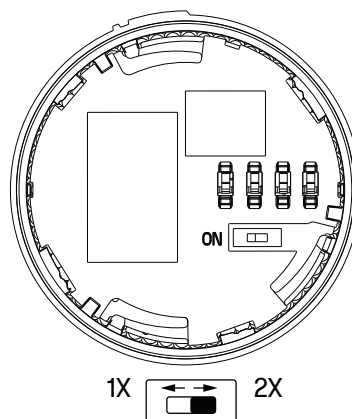

1X 2X

BEACON STEADY/FLASHING MODULE (PC7DCB)

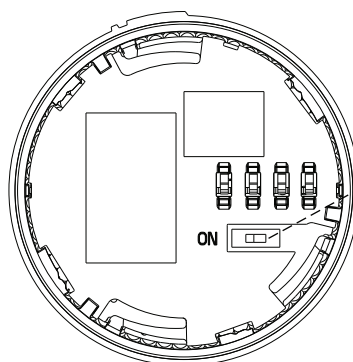



		STEADY
		FLASHING

MULTICOLOR MODULES


	INPUTS		
	1	2	3
GREEN	X		
YELLOW		X	
RED			X
BLUE	X	X	
MAGENTA		X	X
TURQUOISE	X		X
WHITE	X	X	X

INPUT 0 = COMMON

BEACON
(PC7DMB)

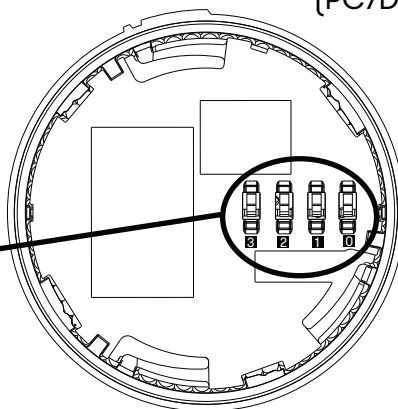

IN-LINE
(PC7DM)

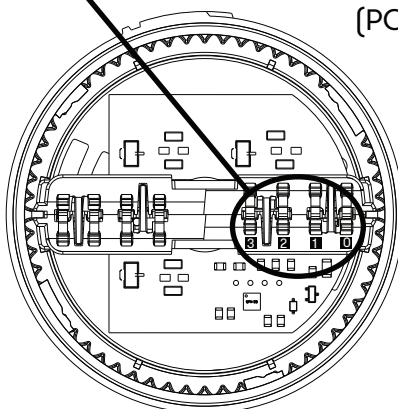

IN-LINE MULTIFUNCTION MODULE (PC7DF)

	SWITCH SETTINGS	
	S1	S2
STEADY	OFF	OFF
FLASHING	ON	OFF
1X STROBE	ON	ON
2X STROBE	OFF	ON

(2Hz)

(1.4Hz)

(1.4Hz)

