


EDM LED panel mount buzzer

- Ø 45 mm panel-mount buzzer with LED steady beacon
- Max. 98 dB (A) sound pressure, infinitely adjustable
- High degree of protection IP 65
- Panel size Ø 22.5 mm/M22
- Steady tone and LED steady light, can be switched separately
- Switching via terminal assignment
- User-friendly connection technology
- For industrial and general applications
- Adapter available for M30.5 mm panel size



TECHNICAL DATA

| | |
|-----------------------|---|
| Housing | Ø 45 mm, Polycarbonate grey or black |
| Lens | Polycarbonate, ribbed inside orange, red |
| Type of mounting | any, any |
| Panel size | 22 mm (M22) and 30.5 mm (with adapter) |
| Connection technology | bis 2,5 mm ² |
| Beacon type | LED steady beacon |
| Tone | 2 Tones, Steady tone |
| Volume | 85-98 dB (can be adjusted when panel mounted) |
| Tone frequency | 3.500 Hz |
| Duty cycle | 100 % |
| Service life | Light source: 100.000 h |
| Operating temperature | -25 °C / +60 °C |
| Degree of protection | IP65 |
| Weight | 65 g |

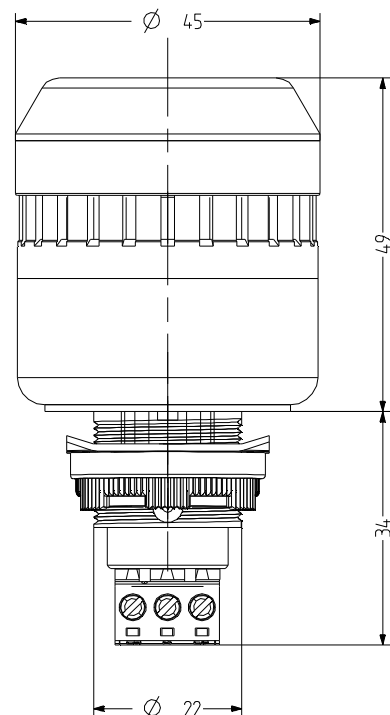

EDM

ORDER DATA

| Lens colour | Nominal voltage | Voltage range (V) | Nominal current (A) | Housing colour | |
|-------------|-----------------|-------------------|---------------------|----------------|-------------|
| | | | | black | grey |
| orange | 12 V AC/DC | +/- 10 % | 0,048 | 813 521 404 | 813 121 404 |
| | 24 V AC/DC | +/- 10 % | 0,073 | 813 521 405 | 813 121 405 |
| | 110-120 V AC | +/- 10 % | 0,051 | 813 521 310 | 813 121 310 |
| | 230-240 V AC | +/- 10 % | 0,051 | 813 521 313 | 813 121 313 |
| red | 12 V AC/DC | +/- 10 % | 0,048 | 813 522 404 | 813 122 404 |
| | 24 V AC/DC | +/- 10 % | 0,073 | 813 522 405 | 813 122 405 |
| | 110-120 V AC | +/- 10 % | 0,051 | 813 522 310 | 813 122 310 |
| | 230-240 V AC | +/- 10 % | 0,051 | 813 522 313 | 813 122 313 |



ADM30

ACCESSORIES

| Type | Type of accessory | Weight | Order number |
|-------|-------------------------------------|--------|--------------|
| ADM30 | Adapter for M30.5 for 30.5 mm holes | 8 g | 812 500 900 |

TONE TABLE

| Tone setting | | | |
|--------------|---|----|--------------------------------------|
| La | N | Lb | Tone and light separately switchable |
| X | X | | continuous tone |
| | X | X | steady light |